

| OVERVIEW |

The Flamefast Pressure Transmitter is an extremely compact unit designed for use with the GasGuard, ServiceGuard and BoilerGuard for low pressure Natural Gas or LPG applications.

When screwed directly into the downstream port of a gas solenoid valve and wired back to the panel with a 3 core cable, the transmitter provides an accurate pressure reading used to monitor for leaks, low pressure as well as overpressure.

PRESSURE TRANSMITTER

Technical Specification

Cable Length1mConnection¼" MOutput1 - 5"


¼" Male BSP 1 - 5VDC

Part Numbers & Options/Accessories

| Part No | |
|---------|--|
| PT00 | |
| PT10 | |

Description Pressure Transmitter - 100mB Pressure Transmitter - 10Bar

HIGH PRESSURE GAS PROVING AVAILABLE ON REQUEST

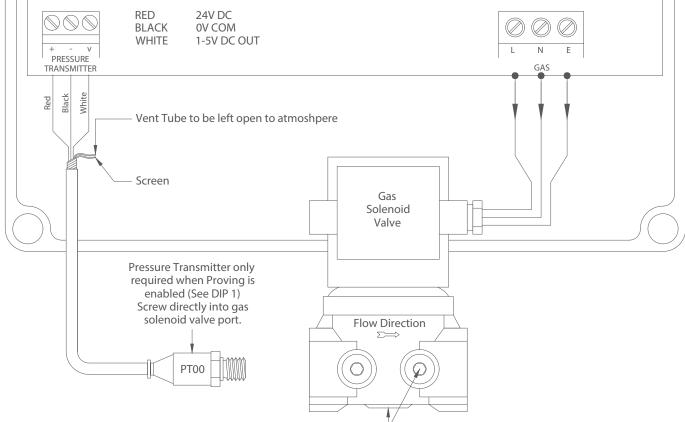

Pressure Transmitter MUST be connected to a DOWNSTREAM port.-

